

FOREST DETECTIVES



HÅKAN BERGSTEDT EXPLAINS HOW HE USES MOBILE GIS TO HELP FOREST LANDOWNERS IN SWEDEN TO WORK OUT WHERE THEIR LAND ACTUALLY IS

Together with a partner, I run a consultancy firm, MittNorr Skog & Fastighet AB, in Östersund, mid-Sweden. We offer a full service for forest owners, helping them to plan and implement their forestry in an economical way that complies with biological conditions, regulations and their own goals. We also offer services for investors by finding, controlling and evaluating forest properties. Visible and precise boundaries are essential for our business. We simply must know which land we are managing.

Bad boundaries are a never-ending issue in mid Swedish forestry. In 1628, Sweden started to build a register of landowners and to mark up their properties in the country.

Since then, many of the old boundaries and properties have been altered for various reasons. That means the register of today has become a puzzle – it is sometimes necessary to go back to the 17th century to find information about what is legally correct. Digital boundary maps available are approximate and the boundaries are normally only accurate to 20m.

There are legally binding boundary markings in the forest consisting of stone-piles. However, many landowners have not maintained these physical boundaries, which are often overgrown by vegetation and so not visible. Many markings have also been destroyed by machines when logging, and

if the forests are at a similar age on both sides of the boundary, it truly becomes a challenge to identify the boundary.

Previously, the Swedish Land Registry offered a service to help landowners detect and mark their boundaries, but this service was shut down in 2017. This has opened a new market for private companies such as ours. In the beginning, we used simple methods to establish the position of the boundaries. With compass, low-precision GPS and a lot of experience, we could manage most boundaries, but pretty soon we got stuck. We solved the problem with a rented Network RTK-GPS (Satlab 300) with centimetre accuracy. However, we were not satisfied with the way we had to work with the GPS since we had to spend a lot of time to get a positional fix in the woods; the user interface was also outdated.

Our replacements

After some research – with expert assistance from the Swedish GIS-supplier Forest IT Design AB – we chose EOS Arrow 100, which uses all the available GNSS satellite constellations: GPS, Gallileo, Glonass and BeiDou.

We primarily using the Arrow with DGNSS-corrections via LTE from SWEPOS, to provide sub-metre accuracy even under heavy canopy and in hilly terrain. SWEPOS

is the Swedish Land Registry's satellite positioning support system, which provides corrections for DGNSS and Network RTK. An option when LTE coverage is poor is to use DGNSS corrections from EGNOS, a European support system via geostationary satellites. This provides sufficient accuracy, but as the satellites are so far south of our work area, a clear view of the south is required to receive the signals well.

We scanned the market for available apps to run on the iPads we already had. We looked closely at ArcGIS, TerraGo and iCMTGIS Pro. Our survey is primarily based on establishing a straight line between two fixed points and extending the line beyond the points. That could easily be done in all three apps, but in the end, we chose iCMTGIS Pro as we found it straightforward to use and it only requires a one-off purchase rather than a subscription. Also worth mentioning is the good help we received during this process from Corvallis Microtechnology.

We are using the app in an iPad Air protected by a LifeProof Fré case. The battery consumption using EOS Tools Pro and iCMTGIS Pro is rather high, the built-in battery lasting for about 4-5 hours at 10-15°C. To use the iPad for a full-day, we use a power bank, which works well down to -15°C if constantly charged.

RIEGL's Line of UAV LiDAR Sensors



VISIT US AT

April 10 - 12, 2018
Amsterdam
The Netherlands
RIEGL booth 412

COMMERCIAL
UAV EXPO
EUROPE

RIEGL miniVUX-1 UAV



Very Compact & Lightweight

1.55 kg / 3.4 lbs

- max. operating flight altitude 330 ft AGL
- range up to 250 m
- accuracy 15 mm, precision 10 mm
- well suited for measuring snow and ice terrains

RIEGL VUX-1 UAV



Compact & Lightweight

3.5 kg / 7.7 lbs

- max. operating flight altitude 1,150 ft AGL
- range up to 920 m
- accuracy 10 mm, precision 5 mm
- ideally suited for power line, railway track, and pipeline inspection

NEW

RIEGL miniVUX-1DL

- "Downward-Looking" LiDAR Sensor
- ideally suited for corridor mapping

Survey-grade LiDAR performance with size, weight, and cost factor that makes deployment on sUAVs practical and economical for commercial applications!

Key Features:

| echo digitization & online waveform processing |
| multiple target capability | eyesafe laser class 1
| ideally suited for the implementation of emerging
surveying solutions by UAS/UAV/RPAS | mechanical
and electrical interface for IMU mounting

RIEGL's full product portfolio for UAV-based surveying missions

RIEGL VUX-SYS | airborne laser scanning system comprising RIEGL VUX-1 UAV, IMU/GNSS unit and optional camera(s)

RIEGL miniVUX-SYS | miniaturized laser scanning system comprising RIEGL miniVUX-1, IMU/GNSS unit and optional camera(s)

RI-COPTER | remotely piloted multi-rotor aircraft equipped with RIEGL VUX-SYS

RIEGL BDF-1 | Bathymetric depth finder for generating profiles of inland waterbodies

BathyCopter | RI-COPTER equipped with RIEGL BDF-1




Stay connected with RIEGL



www.riegl.com



MOBILE GIS

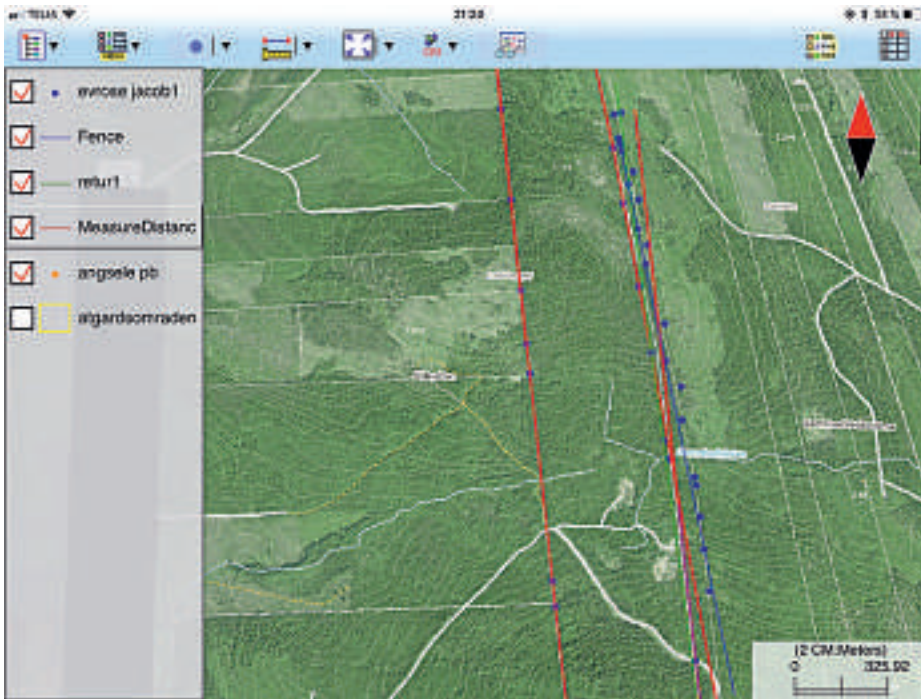

Sometimes it is not easy to sort out which markings are the real ones.

In the field

A mid-Swedish forest property can have many different shapes, but an average is about 200m wide and 2,500m long, with four or more corners. In the corners and at every 100m along the straight lines, there are the same type of markings. Older boundaries created before the metric system was adopted have markings located at other distances. Normally each marking consists of a standing tongue-shaped stone supported by two or more other stones around it. However, there are also other types of markings. Therefore it's sometimes hard to know if a stone pile we've found really is a marking. The distance between markings is the only way

TO GET STARTED WITH A BOUNDARY SURVEY REQUIRES A LITTLE SLEUTHING

to make sure it is indeed a legal marking. Another complication is that sometimes landowners have illegally expanded their properties by moving the markings. Therefore, it is absolutely necessary to make accurate measurements to determine the actual location of the boundary.

To get started with a boundary survey requires a little sleuthing. First, we look through the Land Registry archives to see what has transpired at the actual boundary through the years. It is also important to get information about the neighbouring properties to avoid making unnecessary mistakes.

Satellite maps that includes boundary lines are downloaded from the Land Registry using a web service provider Timmerweb as georeferenced JPEGs. We convert the JPEG to GeoTIFF and create SHP files from the boundaries we need as guide lines, using a Mac, running QGIS. We then export these to iCMTGIS Pro using iTunes.

In the forest, we first have to find at least two markings to get a starting point and to confirm the distance between the markings. When a line is digitally created, it is simple to follow, even if invisible, when using an accurate positioning instrument like the EOS Arrow

and the iCMTGIS Pro. A time-saving function in the app is the ability to set it to beep if you deviate more than 1m from the line, so it is only necessary to look at the display when fine-tuning the boundary. When following the line, more markings are searched to continue the work. Ribbons are used to mark along the identified line so that contractors later can clear and paint the boundary to make it visible.


If a corner marking is not to be found, there are two possible solutions. You can let the Land Registry make a cadastral to establish a legal marking. This is a really expensive procedure, so the most common solution is instead for a company like MittNorr to accurately measure the corner, which the landowners then agree to in writing.

With its know-how and the appropriate equipment MittNorr is proud to be part of the important process of cleaning up the boundary surveys in Sweden.

Håkan Bergstedt is co-founder of MittNorr Skog & Fastighet AB (www.mittnorr.se)



Clearing the boundary with a special saw – a hybrid between a brush cutter and a pole saw

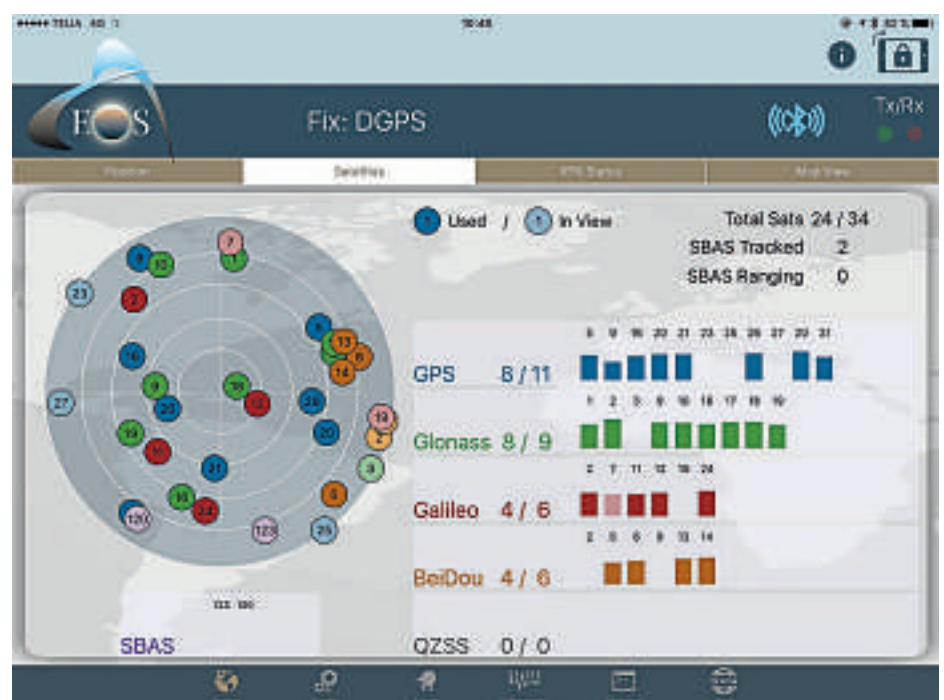

Typical satellite view using EOS 100

SMALL BUT PRACTICAL

AGRICULTURE HAS BEEN IMPORTANT TO TAIWAN FOR CENTURIES.
NOW MODERN DEMANDS MEAN IT IS ADOPTING MOBILE GIS.
PATTY CHEN EXPLAINS

One of the most important industries in Taiwan for centuries, agriculture is now facing extreme challenges from aging farmers, limited water resources and foreign competition. The government of Taiwan is therefore actively looking for different ways to enhance agricultural productivity.

The Agricultural Economy Section, Civil Affairs Office of Guanyin District, Taoyuan City, is the interface between the government and local farmers. Its main jobs are assisting farmers to prevent plant disease and insect pests, and managing permissions for farming, machine-use and so on. It also takes care of pollution-prevention and beautification, to build a sustainable environment. If there is a natural disaster, farmers can also submit subsidy applications to receive recompense.

The section sought new tools to assist them in their work. It chose mobile GIS to simplify its farmland maintenance workflow, because this can systemically collect and organise land information, and the mobile cost is relatively low.

The ideal scenario was that civil servants would be able to have an up-to-date basemap, satellite imagery and land parcel

layers together on single platform. This platform should integrate all the resources and allow investigators to make notes, change farm statuses and boundaries, take photos, and sync to the office's systems.

There were many mobile GIS solutions available from local geospatial consultants in Taiwan. One provided satellite imagery and cadastral data in map tile format – a light raster format that you can use as a basemap but is uneditable and does not contain detailed point, line or polygon features on. Hence, as there were plenty of areas that needed their cadastral boundaries reinvestigating, to make sure officers can find the right person to pay fees, data selection needed to be more flexible and editable, so the office decided not to use this solution.

Word of mouth

While Guanyin District was searching for a suitable mobile GIS solution, at a meeting of local sectors, it received a recommendation

from its neighbour, Daxi District, which has implemented SuperGIS solutions for 10 years. The two sections handle similar tasks, so Guanyin District began to research to see if they can duplicate Daxi District's solution in its own region.

Since Guanyin did not have extra budget to purchase new devices, it was looking for software that it could install on a commonly used OS but that was equipped with the most-used GIS functions. SuperSurv 10 for Android met all their requirements, as it is easy to use and offers an offline mode, supports multiple data formats, can connect with cloud drives and can import raster data as a basemap.

Starting in May 2017, Guanyin District began to use SuperSurv to audit farms, to investigate if certain farmland was eligible for disaster subsidy and update any land parcels as necessary. The officials pre-loaded cadastral maps and satellite imagery using Dropbox or Google Drive so they could display all the data in one app. The mobile GIS

PREVIOUSLY, ON-SITE INVESTIGATION TOOK MORE THAN ONE WORKING DAY; NOW, IT TAKES ONLY HALF DAY OR LESS